# **DATASHEET**

# LC Female to ST Female Hybrid Fiber adapter

Simplex-Sc footprint 1



Simplex-Sc footprint 2



Duplex -Sc footprint



© RoHS



# OMC (TITH LC Female to ST Female Hybrid fiber adapter

#### Description

**Female to Female Hybrid Adapter** are developed to couple and mate two different (hybrid) connector plugs. The housing of the Adapters of the last generation has a reference key for the right position coupling and zirconia or phosphorus bronze split sleeve for high alignment.

This **LC(Female)** to **ST(Female)** SC footprint type fiber optic hybrid adapter, Converting LC connector to ST Connector. Variable LC interface conversion ST interface. Provided a simple and reliable solution for connecting two different optic fiber transmission joints.

#### Material

Parts name	Material	Color	
Housing body	Zinc alloy	-	
Sleeve	High precision Ceramic sleeve	White	
Dust Cover	ABS/Rubber	White/red/green/black	


### Specification:

Test item	(SM-9/125) UPC	(SM-9/125) APC	MM PC			
Insertion Loss		≤0.5dB (max) 0.3dB(mean)				
Return Loss	≥50 dB	≥60 dB	≥35 dB			
Durability (500 Mating)		0.1dB Max.				
Withdrawal force(g/f)		200~600				
Storage Temp		-40 ~ +85				

#### **Products details**





Simplex-Sc footprint 1





Duplex -Sc footprint



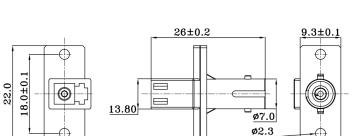

Simplex-Sc footprint 2



2.5mm-1.25mm High precision ceramic sleeve

#### Available


SM UPC, SM APC, MM OM1 62.5/125, MM OM2 50/125 MM OM3 50/125 MM OM4 50/125



# OMC Female to LC Female Hybrid fiber adapter


### **Features**

Precision connection with sleeve SM and MM connector can be used interchangeably Low insertion loss, High Return loss Good interchangeability and reliability Meet IEC and ROHS standards High precision of mechanical dimensions Accuracy

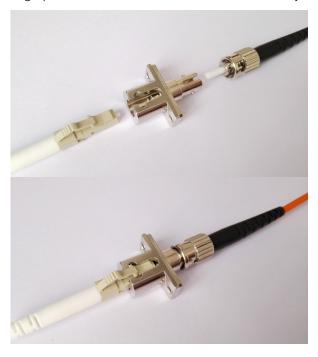

# **Applications**

Patch panels, ODF and other optical connections.
Optical networks demarcation and monitoring point

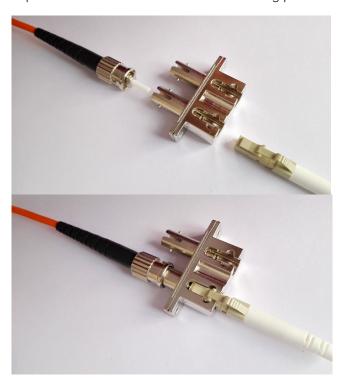

# Order index

Products -	Fibers	- Fiber Mode	- Fiber Port -	Adapter Shape	- Color
H2-Female to Female	1-Simplex	1- SM 9/125	A - FC/LC	1 - Standard	1 - metal
Fiber Adapter	2-Duplex	2- OM1 62.5/125	B - FC/SC	2 - SC footprint 1	2 - Blue
		3- OM2 50/125	C - FC/ST	3 - SC footprint 2	3 - Green
		4- OM3 50/125	D - LC/ST	4 - D hole	4 - Aqua
		5- OM4 50/125	E - LC/SC	5 - Square	5 - Beige
			F - SC/ST	6 - Rectangle	6 - meganta
			G - LC/E2000	7 - Rhombus	
			H - FC/E2000		
			I - DIN/FC		
			J - DIN/LC		
			K - DIN/SC		
			L - DIN/ST		
			M - SMA/SC		
			N - SMA/FC		
			O - SMA/ST		