

SPECIFICATION

OP(SCAPC)-SCAPC G657A2 SX 4.5X9.8MM FTTH FLAT DROP CABLE PATCH CORD





OP(SCAPC)-SCAPC G657A2 SX 4.5x9.8mm FTTH Flat Drop cable Patch cord

Description

It's a kind of FTTH patch cord assembly with **4.5*9.8mm Flat FTTH Drop Cable**. It adopts lower insertion loss SC technologies, and compact cable structure, achieving fast deployment, high reliability, and durability.

This is a last cable in FTTH project. Used widely between MST, FAT, FTTX Pro -connectorized terminal box tec. With easy accessibility to the fiber and simple installation.



Patch cord's Optical Specifications

Connector	OP (SC) –Standard SC	Polish	APC-APC
Fiber Mode	9/125μm, G657A2	Jacket Color	Black/Grey
Cable OD	4.5±0.3mm x9.8±0.3mm	Wavelength	SM:1310/1550nm
Cable Structure	Simplex	Jacket Material	LSZH
Insertion loss	≤0.3dB	Return loss	SM APC ≥ 60dB(min)
Operation Temperature	-20 ~ +70°C	Install&Storage temperature	-40 ~ +70°C


Remark: The IL in the table is only refer to the IL (connector). The product IL must contain the connector IL and fiber cable IL, IL all = 2 x IL (connector) + IL (1km cable IL)/1000 x L (cable length).

Mechanical and Environmental Characteristics

Items	Unite	Specifications	Reference
Span Length	M	50	
Tension(Long Term)	N	300	IEC 61300-2-4
Tension (Short Term)	N	600	IEC 61300-2-4
Crush (Long Term)	N/10cm	500	IEC 61300-2-5
Crush (Short Term)	N/10cm	1000	IEC 61300-2-5
Min. Bend Radius (Dynamic)	mm	20D	
Min. Bend Radius (Static)	mm	10D	
Operating Temperature	°C	-20~+60	IEC 61300-2-22
Storage Temperature	°C	-20~+60	IEC 61300-2-22

End-Face Quality (SM)

Zone	Range (μm)	Scratches	Defects	Reference
A: Core	0 to 25	None	None	IEC 61300-3-35:2015
B: Cladding	25 to 115	None	None	
C: Adhesive	115 to 135	None	None	
D: Contact	135 to 250	None	None	
E: Rest of ferrule		None	None	

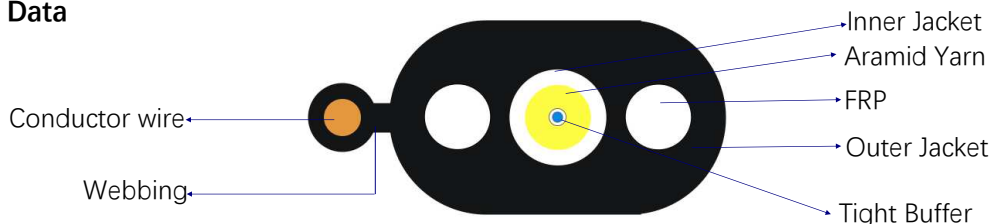
Cable Technical Data


Item	Contents	Unit	Value
Optical Fiber	model number	/	G657A1/G657A2
	number	/	1
	Color	/	blue
Strength member	Material	/	FRP
	Diameter	mm	1.6
Tight buffer	color	/	White
	material	/	LSZH
	diameter	mm	0.9
Inner jacket	Diameter	mm	3.0±0.1
	Material	/	LSZH
	Color	/	White&Black or Others
Outer jacket	Diameter	mm	4.5±0.3*9.8±0.3
	Material	/	HDPE
	Color	/	Black
supporting wire	Material		Copper Conductor
	Diameter	mm	0.5
Tensile performance	Short term	N	1350N (fiber strain≤0.8%)
	Long term	N	600
Crush	Short term	N/100mm	1000
	Long term	N/100mm	300

Connector Optical Specifications

Type	OP SC/APC ,Compatible with OptiTap SC APC
Insertion loss	Max. ≤ 0.3 dB
Return loss	≥ 60 dB
Tensile strength between optical cable and connector	Load: 300N Duration: 5s
Water proof	IP67
Fall	Drop height: 1.5 m Number of drops: 5 for each plug Test temperature: -15°C and 45°C
Bending	Load: 45 N; Duration: 8 cycles, 10s/cycle
Torsion	Load: 15 N; Duration: 10 cycles ± 180°
Static side load	Load: 50 N for 1h
Water proof	Depth: under 3m of water. Duration: 7 days
Change of temperature	Temperature: -25°C to 70 °C Duration at extreme temps: 1h Temperature change speed: 1°C/min Cycles: 12

Length Tolerance

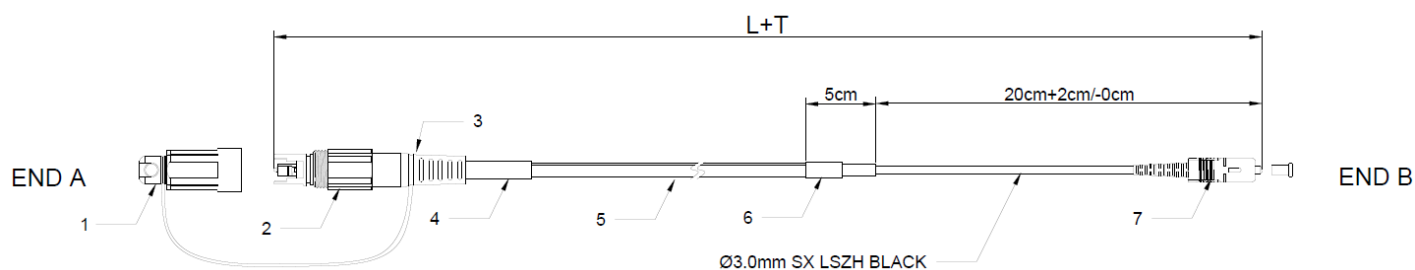

Overall Length(L) (m)	length of tolerance (cm)
10<L<40	+15/-0
40<L	+0.5% x L/-0

Packaging

This easily taken and well-protected fiber patch cable package has been labelled and marked by OMC as default . Which carton to be used depends on goods Qty . Packing can be customized.



1,PE Wrap



2, Paper Carton



3,Fuming-free Pallet

Application

Multi-purpose Outdoor&Indoor.
 For connection between distribution box and RRH.
 Deployment in Remote Radio Head cell tower applications.
 Fiber optic communications in harsh outdoor environments
 Outdoor communication equipment connection
 Waterproof fiber equipment SC port Remote wireless base station
 FTTH wiring project

Features

Fast deployment, plug and play.
 Double locked anti-vibration design.
 Easy to install and uninstall.



OP(SCAPC)-SCAPC G657A2 SX 4.5x8.0mm FTTH Flat Drop cable Patch cord

Installation conditions

Weather condition	Max. span(m)	Installation sag	Installation sag ratio (m)	Installation tensile (N)	Weather load tensile (N)	weather load sag(m)	weather load sag ratio
Max. wind speed: 37 m/s ice: 0	50	1.5%	0.5	157	773	1.44	2.9%
Max. wind speed: 26.67 m/s ice: 0	80	1.0%	1.125	157	713	2.23	3.0%
Max. wind speed: 10.7 m/s ice: 6.35mm	70	1.4%	0.98	157	744	2.09	3.0%