

DATASHEET

Visual Fault Locator

STRONG LIGHT SOURCE, STABLE PERFORMANCE



RoHS



OMC INDUSTRY CO.LIMITED



Visual Fault Locator

Specification:



STRONG LIGHT SOURCE, STABLE PERFORMANCE




| Part NO. | BML-205-1 | BML-205-10 | BML-205-15 | BML-205-20 | BML-205-25 | BML-205-30 |
|------------------|------------------------------------|------------|------------|------------|------------|------------|
| Output Power | > 1mW | > 10mW | > 15mW | > 20mW | > 25mW | > 30mW |
| Dynamic Distance | 3~5 km | 8~10 km | > 10km | > 10km | > 10km | > 10km |
| Wavelength | 650nm 20nm | | | | | |
| Operation Mode | Pulsed(2Hz) and CW | | | | | |
| Connector | 2.5mm UPC(or customize 1.25mm UPC) | | | | | |
| Size(H*W*D) | 175mm * 26mm * 26mm | | | | | |
| Weight | 80g | | | | | |

How to Use it?



Suit for Below connector

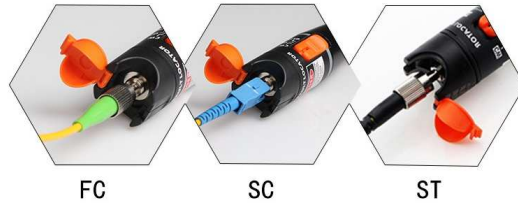


Features:

- Bright red laser at 650nm
- Pulsed and CW operation
- Standard AA alkaline batteries
- Fast locate the broken point
- Rugged and waterproof design
- 2.5mm universal connector



All Aluminum Alloy Material body

Metal 2.5mm port Laser

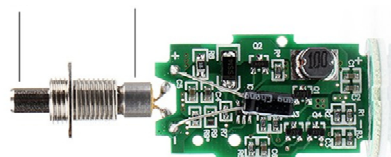

ACCESSORIES

Standard



Quick Guide*1



Soft Bag*1



Packing Box*1

Op-



2.5mm to 1.25mm adapter